

DRIVEWAYS
 SIDEWALKS
 PORCHES
 STOOPS
 POOL DECKS
 PATIOS
 INTERIOR SLABS

* * *

RESIDENTIAL
 COMMERCIAL
 MUNICIPAL
 DOT

Oak Ridge Foam & Coating Systems, Inc.

575 Commercial Ave.
 Green Lake, WI 54941

Phone: 800-625-9577
 Fax: 920-294-6830

www.oakridgepoly.com
 info@oakridgepoly.com



Before ^ After



Before ^ After



Make Concrete
 Great Again!



Concrete Lifting
 Void Fill
 Stabilization
 With Poly Foam



Foam & Coating Systems, Inc
 Manufacturer of High Performance
 Foam/Coatings & Application
 Equipment



Don't replace your concrete, Raise it! Why?

Safety – Trip hazards

Appearance – eyesore

Cost Effective – 50% lower than replacing slab

Time – faster repair method, 1-4 hours start to finish, cures in less than 15 min.

Lightweight – 2# (per cubic ft.) foam will not lose its density (mudjacking 100 lbs. per cubic ft.)

Structural Damage- Walls, doors, windows may be affected


Resale value

10 Year Warranty

non transferable

Oakridgepoly.com

800-625-9577

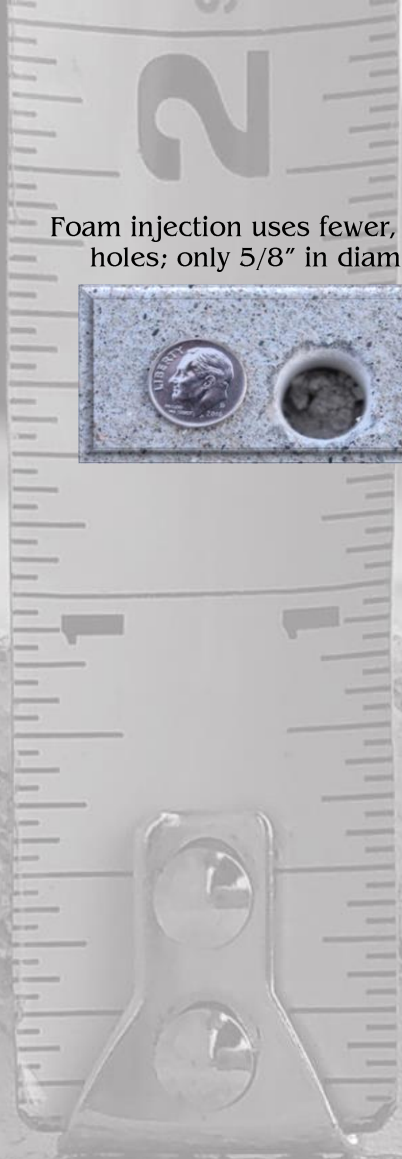

Foam injection uses fewer, smaller holes; only 5/8" in diameter.



What causes concrete to settle?

Age

Poor soil
excavation/compaction
Erosion

Critters

Tree roots

Heavy traffic/traffic
vibration

Slab curl

Climate/frost

Clay soil expansion

	Foam Jacking	Mud Jacking	Slap Piers	Replacement
Hole Size	5/8"	1 – 5/8"	9"	n/a
Lifting Potential	High	High	Slight	n/a
Speed	Fast	Moderate	Slow	Very Slow
Disruption	Low	Moderate	High	Very High
Cost	\$3-10/ sq. ft.	\$5-10/ sq. ft.	\$20-40/ sq. ft.	\$30+/ sq. ft.
Material Weight	4 PCF	120 PCF	Leaves Voids	120 PCF
Cleanliness	Very Clean	Messy	Messy	Messy